

MEP20691

Ways To More Effectively Utilize REVIT For Electrical Design

Stephanie P. Elliott, PE, LEED AP BD+C, GGP - Electrical Engineer/ BIM Coordinator - Jacobs Engineering

Learning Objectives

- Utilize schedules to perform energy code calculations
- Utilize schedules to better coordinate electrical circuitry with mechanical and plumbing loads
- Utilize schedules to check electrical design at the panel and breaker level
- Utilize view filters to catch uncircuited electrical items as well as other disciplines that require power

Description

This class will discuss and present ways to more effectively utilize REVIT for electrical design by better utilizing the data already in the model to perform calculations and checks. Rather than spending days working on the energy code calculation counting the fixtures and space square footages, imagine if you could print out a REVIT schedule with all the information needed to fill out COMCheck in a matter of minutes. REVIT can also be used to help the senior engineers and the QA/QC teams quickly to check the electrical backbone of a building for things like over and under-loading of electrical panels/transformers as well as branch circuit loading to check breaker size, wire size, and load classification with all the information exactly as it is currently modeled. A series of schedules can also compare the current Mechanical/plumbing schedules with the current electrical design load to ensure they match. Filters can be used to check for uncircuited items as a quick backcheck.

Your AU Expert



Stephanie P. Elliott, PE, LEED AP BD+C, GGP is a licensed electrical engineer for Jacobs Engineering Group Inc. She is a LEED AP BD+C and a Green Globes Professional. She is a Revit MEP 2015 and Revit 2016 Electrical Certified Professional and serves a dual role as the Houston office Building Information Modeling (BIM) coordinator as well as being an electrical engineer. She has been working in Revit software since 2007 and has experience with Revit software-based projects in many areas, including aviation, convention centers, data centers, education, federal, high-rise office towers, hospitality, and specialty facilities. Stephanie has served as an MEP BIM consultant for Revit projects that span 1 million square feet, as well as for campus projects with a central plant.

Email: stephaniepelliott@gmail.com

Introduction

According to Autodesk, Revit is building design software is specifically built for Building Information Modeling (BIM), including features for architectural design, MEP and structural engineering, and construction.

Autodesk purchased the Revit idea in 2006 and starting around 2010 architectural firms started to prefer to perform design work in REVIT even if the final deliverable was ACAD. Why? Architects had figured out how to utilize the information in the model to their advantage, to improve their efficiency, coordination and design. The same this is possible for the MEP team as well. We are able to use the Revit model to improve our designs and coordination as well. As Engineers and Designers, we have to have a mindset shift from ACAD to Revit. Our thinking has to shift from ACAD which is a drafting tool only to REVIT which is a database that does some drafting on the side.

Utilize schedules to perform energy code calculations

Determining when to perform the take-offs and fixture counts needed for the energy code is a tight rope walk. Too early and the lighting design will change substantially and the effort will be wasted. Too late and it is difficult to react to energy code concerns and still make the deadline.

How We Use to Perform Energy Code Calculations?

Energy code calculations were never a quick and simple task. We used to have to open ACAD and draw Polylines (P-Lines) around each space and do hand area take-offs. We then had to transfer that data to Excel. Next we would grab out highlighters and print out the light drawings full size and hand-count all of the fixtures per space and then input those counts into our spreadsheet. If we were lucky then we could fill out the energy code form as the whole building method and save ourselves some time.

How We Can Use REVIT to Perform Energy Code Calculations


Using Schedules in Revit, we can go from spending hours/days counting fixtures in order to report on whether a project meets the energy code to real time reporting at any phase of the design. Imagine the time and rework savings being able to continuously monitor energy code status on a project! So how do we set up our projects to achieve this?

Step1: Create Spaces based off the Architectural Rooms

In order for our energy code calculation to work, all of the light fixtures in the model need to inherently know what space they reside in. We achieve this by placing spaces in the electrical model. An important thing to understand is the difference between Rooms and Spaces in Revit. Rooms are used predominately on the Architecture side of things to address things like Room Name, Number, Square Footage, and Occupancy. Spaces are used for MEP calculations requiring volume information. A space understands in which room of a linked model it resides, and it can report the identity of that room.


To add spaces to the Electrical Model,

Go the Analyze tab and select the Space Button on the Spaces & Zones panel



This will trigger the Modify/Place Space Panel. Check the Upper Limit Setting and Offset Values. The Upper Limit value is Z axis value for the space volume. The Offset Value is an additional adder to the Upper Limit Value if needed. For MEP work the recommendation is to use the Level Datums i.e. Upper Limiting Settings to define the height of the space to ensure the entire volume between structural slabs is accounted for.

Once the Upper Limit and Offset have been set, select the Place Spaces Automatically Button



Revit will then create spaces for all enclosed areas greater than 0.25 sq. ft. Revit will arbitrarily name and number all of the spaces. This is where the space naming utility comes into play. The Space Naming Utility Revit automatically renames spaces to match their associated rooms. This plug-in is typically part of the Autodesk Subscription package.

Step 2: Create a Room Schedule and define Space Type

- 1. Go to the view tab and select "Schedules" under the create pane or right click on Schedules on the project browser.
- 2. Select "New Schedule/ Quantities"
- 3. Under category select "Rooms"
- 4. Select the following Available Field and click Add→:
 - a. Number
 - b. Name
 - c. Limit Offset
 - d. Space Type
 - e. Actual Lighting Load
 - f. Actual Lighting Load per Area

- g. Specified Lighting Load
- h. Specified Lighting Load Per Area
- 5. If energy code will be achieved via space by space method, then go room by room and define the space category to be applied.
- 6. Go back to Visibility/Graphics Override window, on the Fields tab, create some calculated values to help with the calculations. Select Calculated Value button.
 - a. Above LPD Allowance

i. Name: Above LPD Allowance

ii. Discipline: Common

iii. Type: Number

iv. Formula: Actual Lighting Load / Specified Lighting Load

b. Square Footage

i. Name: Square Footage

ii. Discipline: Common

iii. Type: Area

iv. Formula: Specified Lighting Load / Specified Lighting Load per area

- 7. On the Sorting/Grouping tab, sort by Name or Number, whichever you prefer
- 8. At the bottom of the Sorting/Grouping tab, check the box for Grand Totals and select Title and Totals.
- 9. Click on the Formatting tab, select the following parameters and check the Hidden check box
 - a. Square Footage
 - b. Above LPD Allowance
- 10. Select Actual Lighting Load and then click on the Conditional Formatting Field to create the test to determine if the lighting layout in the room exceeds the energy code allowance.
- 11. Select the following:

a. Field: Above LPD Allowance

b. Test: Greater Than

c. Value: 1

d. Background Color: Yellow

12. Select Actual Lighting Load per Area and repeat Step 10.

| <ashrae check="" code="" energy=""></ashrae> | | | | | | | | |
|--|--------------------------|----------------|--------------------------------|------------------------|----------|------------------------|-----------------|--|
| Α | В | C D | | E F | | G | Н | |
| Number | Name | Square Footage | | Specified Lighti | | Actual Lighting | Actual Lighting | |
| I1130 | JAN. CLOSET | 40 SF | Active Storage | 0.80 W/ft ² | 32 VA | 1.60 W/ft² | 64 VA | |
| I1108 | INSULATION STORAGE | 1978 SF | Active Storage | 0.80 W/ft ² | 1582 VA | 0.59 W/ft ² | 1176 VA | |
| I1114 | HAND TOOL SECURE STORAGE | 270 SF | Active Storage | 0.80 W/ft ² | 216 VA | | 320 VA | |
| 11128 | CONFERENCE / BREAK ROOM | 384 SF | Conference Meeting/Multipurpos | 1.30 W/ft ² | 500 VA | 0.56 W/ft ² | 216 VA | |
| 11107 | CORRIDOR | 923 SF | Corridor/Transition | 0.50 W/ft ² | 461 VA | | 220 VA | |
| 11901 | MECHANICAL / COMPRESSOR | 252 SF | Electrical/Mechanical | 1.50 W/ft ² | 378 VA | 1.53 W/ft ² | 384 VA | |
| 11903 | ELECTRICAL / COMM. | 151 SF | Electrical/Mechanical | 1.50 W/ft ² | 227 VA | 1.27 W/ft ² | 192 VA | |
| 11902 | П | 64 SF | Electrical/Mechanical | 1.50 W/ft² | 97 VA | 1.99 W/ft² | 128 VA | |
| 11126 | OFFICE | 96 SF | Office - Enclosed | 1.10 W/ft² | 106 VA | 0.75 W/ft ² | 72 VA | |
| 11124 | OFFICE | 94 SF | Office - Enclosed | 1.10 W/ft ² | 103 VA | 0.77 W/ft ² | 72 VA | |
| 11122 | OFFICE | 98 SF | Office - Enclosed | 1.10 W/ft ² | 107 VA | 0.74 W/ft ² | 72 VA | |
| 11110 | BUILDING MAINTENANCE | 1213 SF | Office - Enclosed | 1.10 W/ft ² | 1334 VA | 0.97 W/ft ² | 1176 VA | |
| 11120 | OFFICE | 96 SF | Office - Enclosed | 1.10 W/ft² | 106 VA | 0.75 W/ft ² | 72 VA | |
| 11118 | COPY / SUPPLY RM | 122 SF | Office - Enclosed | 1.10 W/ft² | 134 VA | 0.59 W/ft ² | 72 VA | |
| 11102 | MEN'S | 195 SF | Restrooms | 0.90 W/ft ² | 175 VA | 0.88 W/ft ² | 172 VA | |
| I1101 | WOMEN'S | 82 SF | Restrooms | 0.90 W/ft² | 74 VA | 1.04 W/ft² | 86 VA | |
| 11104 | INSULATION SHOP | 812 SF | Workshop - Workshop | 1.90 W/ft² | 1543 VA | 1.45 W/ft ² | 1176 VA | |
| 11106 | INSULATION SHOP | 1299 SF | Workshop - Workshop | 1.90 W/ft² | 2467 VA | 0.91 W/ft ² | 1176 VA | |
| 11112 | CARPENTER SHOP | 2041 SF | Workshop - Workshop | 1.90 W/ft² | 3879 VA | 0.86 W/ft ² | 1764 VA | |
| I1116 | DUST COLLECTOR | 68 SF | Workshop - Workshop | 1.90 W/ft² | 129 VA | 0.80 W/ft ² | 54 VA | |
| Grand total | | | | | 13650 VA | | 8664 VA | |

This gives a snap shot of spaces that exceed their energy code allowance as well as the grand totals at the bottom to verify if we are able to trade Wattage allowances between spaces to meet the energy code overall.

Step 3: Create a COMCheck Schedule

- 1. Go to the view tab and select "Schedules" under the create pane or right click on Schedules on the project browser.
- 2. Select "New Schedule/ Quantities"
- 3. Under category select "Light Fixtures"
- Select the following Available Field and click Add →:
 - a. Type Mark
 - b. Manufacturer
 - c. Lamp
 - d. Lamp Quantity
 - e. Wattage
 - f. Count
 - g. Change the Select available Fields to Spaces and select Space Type
 - h. Cove Fixture Count (user added parameter to family that takes the length value and divides it by a fixed off the shelf fixture length value)
- 5. Still on the Fields tab, create some calculated values to help with the calculations. Select Calculated Value button.
 - a. Wattage Per Type
 - i. Name: Wattage Per Type

ii. Discipline: Common

iii. Type: Number

iv. Formula: Lamp Quantity * (Wattage / 1 W)

b. Count Manual

i. Name: Count Manual

ii. Discipline: Common

iii. Type: Number

iv. Formula: 1

c. Cove WholeNumber

i. Name: Cove WholeNumberl

ii. Discipline: Common

iii. Type: Number

iv. Formula: roundup(Cove Fixture Count)

d. Combined Count

i. Name: Combined Count

ii. Discipline: Common

iii. Type: Number

iv. Formula: if(Cove Fixture Count > 1, CoveWholeNumber, CountManual)

- 6. On the Sorting/Grouping tab, sort by Space Type and then Type Mark.
- 7. At the bottom of the Sorting/Grouping tab, check the box for Grand Totals and select Title and Totals.
- 8. Uncheck the itemize every instance checkbox.
- 9. Under the Formatting tab, check the calculate totals check box for the following fields:
 - a. CountManual
 - b. Cove Fixture Count
 - c. Cove WholeNumber
 - d. Combined Count

| <lighting code="" energy=""></lighting> | | | | | | | | |
|---|--|--------------|--------------------|----------------------|-------|---------|--|--|
| Α | В | CDD | | E | F | G | | |
| TYPE MAR | TYPE, MANUFACTURER AND MODEL NUMBER | JEHou Lamp C | LAMP TYPE | LAMP WATTA Watts per | | e Count | | |
| | EXTERIOR WALL PACK. LITHONIA DSXW1 LED-20C-700-40K-T4M-MVOLT-DWHXD | 4 | LED | 47 W | 47 | 14 | | |
| | EXTERIOR WALL PACK, LITHONIA DSXW1 LED-30C-700-40K-T4M-MVOLT-DWHXD | | LED | 71 W | 852 | 12 | | |
| -10E | 6" DIA. RECESSED LED DOWN LIGHT, LITHONIA LDNG 35/10 LOGAR 277 EL | | LED | 18 W | 18 | 16 | | |
| ME | EXTERIOR WALL PACK, LITHONIA DSXW1 LED-10C-530-40K-T3M-MVOLT-ELCW-DWHXD | | LED | 20 W | 60 | | | |
| <i>i</i> ic | LITHONIA LIGHTING EXG LED EL M6 | | LED | 3 W | 9 | | | |
| ctive Stora | | | LED | 3 VV | 3 | | | |
| t Stora | LITHONIA LIGHTING C 2 32 MVOLT GEB10PS | 2 | F32T8 | 32 W | 256 | 4 | | |
| SE | LITHONIA LIGHTING C 2 32 MVOLT GEB10PS EL. EMERGENCY LIGHT WITH BATTERY PACK. | 3 | F32T8 | 32 W | 128 | 2 | | |
| 34 | 2X4 FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD WGX | - A | F54T5HO/841/EA/ALT | 54 W | 864 | A | | |
| 54E | 2X4 FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD W.X. | | F54T5HO/841/EA/ALT | 54 W | 432 | 2 | | |
| 74E | LITHONIA LIGHTING EXG LED EL M6 | | LED | 3 W | 3 | 1 | | |
| Conference | Reting/Multipurpose | | LED | 3 44 | 3 | | | |
| Omerence | VOLUMETRIC TROFFER 2X2 LED LAY-IN. LITHONIA 2VTL2 - 33L-ADP-MVOLT-EZ1-LP835-N100 | 4 | LED | 33 W | 165 | E | | |
| E | VOLUMETRIC TROFFER 2X2 LED LAY IN LITHONIA 2VTL2 - 331-ADP MVOLT EZ1-LP835-N100-EL14L | | LED | 33 W | 33 | 1 | | |
| orridor/Tran | | | LED | 33 W | 33 | | | |
| WITHGOT IT AL | VOLUMETRIC TROFFER 2X2 LED LAY-IN, LITHONIA 2VTL2 - 20L-ADP-MVOLT-EZ1-LP835-N100 | 1 | LED | 20 W | 100 | 6 | | |
| E | VOLUMETRIC TROFFER 2X2 LED LAY-IN, LITHONIA 2VTL2 - 201-ADP-MVOLT-EZ1-LP835-N100-EL14L | | LED | 20 W | 120 | 6 | | |
| N | LITHONIA LIGHTING EXG LED EL M6 | | LED | 3 W | 6 | | | |
| lectrical/M- | | | LLU | J 44 | | - | | |
| iecticas ivi | LITHONIA LIGHTING C 2 32 MVOLT GEB10PS | 2 | F32T8 | 32 W | 320 | 6 | | |
| BE. | LITHONIA LIGHTING C 2 32 MVOLT GEB10PS EL EMERGENCY LIGHT WITH BATTERY PACK | 3 | F32T8 | 32 W | 384 | 6 | | |
| Office - Encl | | L | F3216 | DZ VV | 304 | 0 | | |
| IIICE - LIICI | VOLUMETRIC TROFFER 2X2 LED LAY-IN. LITHONIA 2VTL2 - 33L-ADP-MVOLT-EZ1-LP835-N100 | 1 | LED | 33 W | 297 | 9 | | |
| E | VOLUMETRIC TROFFER 2X2 LED LAY IN, LITHONIA 2VTL2 33L-ADP MVOLT EZ1-LP835-N100-EL14L | | LED | 33 W | 33 | 1 | | |
| 4 | 2X4 FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD WGX | | F54T5HO/841/EA/ALT | 54 W | 864 | À | | |
| 4E | 2X4 FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD EL14 WGX | | F54T5HO/841/EA/ALT | 54 W | 432 | 9 | | |
| estrooms | 2A4 TEOGRESCENT HIGH DAT EIGHT EHMONIA EIGHTNO IDZ 454E WD EE 14 WOX | | I SATSHONA INCAME! | 34 11 | 432 | | | |
| estrooms | LITHONIA LIGHTING WL4 41L D43 LP835 NX | 1 | LED | 43 W | 172 | 4 | | |
| F | LITHONIA LIGHTING WL4 41L D43 LP835 NX EL14L EMERGENCY LIGHT WITH BATTERY PACK. | | LED | 43 W | 86 | 2 | | |
| | Workshop | | LED | 140 11 | 00 | E | | |
| 4 | VVOIKSHOP 12X4' FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD WGX | A | F54T5HO/841/EA/ALT | 54 W | 3240 | 15 | | |
| 4E | 2X4 FLUORESCENT HIGH BAY LIGHT LITHONIA LIGHTING IBZ 454L WD WGX | | F54T5HO/841/EA/ALT | 54 W | 1296 | 6 | | |
| V | 4' STRIP FLUORESCENT LITHONIA LIGHTING FENA 1 5475HO BMPCL MVOLT GEB10PS90 | | F54T5HO/841/EA/ALT | 54 W | 54 | 1 | | |
| Y | LITHONIA LIGHTING EXG LED EL M6 | | LED | 3 W | 9 | 3 | | |
| Grand total: | | | LED | 13 VV | 10274 | 13 | | |

Utilize schedules to better coordinate electrical circuitry with mechanical and plumbing loads

Creating schedules to help with the coordination between electrical and Mechanical and Plumbing is a little more difficult because to be able to use the data in their schedules the parameters have to be set up in such a way that we are able to pull the data across the link and incorporate it into our schedules.

First thing is to import Mechanical and Plumbing schedules in to the Electrical Model.

- 1. Go to a floor plan view. Click on the insert tab and select Insert from File on the Import Pane.
- 2. Navigate to and select the Mechanical Model.
- 3. Select all of the mechanical equipment schedules requiring electrical power and click import.
- 4. Open each of the imported schedules and check the box Include Elements in Links.


Next, create an electrical circuit schedule that isolates the mechanical and/or plumbing loads.

| <mechanical equipment="" schedule=""></mechanical> | | | | | | | | | | | | |
|--|---------|--------------|------------------|----------------|-----------------|-----------|-----------|-----------|---------|--------------|-------|----------------|
| MEST ATTO A E EQUI MENT GOTTE SEE | | | | | | | | | | | | |
| Α | В | С | D | E | F | G | H | 1 | J | K | L | M |
| Load Descriptio | Voltage | No. of Poles | Load Classificat | Breaker Rating | Disconnect Rati | Fuse Size | Load Amps | Load | Remarks | HP | Panel | Circuit Number |
| AHU-NCN-1 | 480 V | 3 | Motor | 20 | 30 | | 11 | 8800 VA | | (1) 7.5 HP | 1DAC | 9 |
| AHU-NCN-1 | 480 V | 3 | Motor | 30 | 30 | | 11 | 9100 VA | | (1) 7 1/2 HP | 1DAD | 18 |
| AHU-NCN-1 | 480 V | 3 | Motor | 50 | 60 | | 27 | 21500 VA | | (1) 20 HP | 1DAH | 6 |
| AHU-NCN-1 | 480 V | 3 | Motor | 40 | 60 | | 21 | 16700 VA | | (1) 15 HP | 1DAD | 10 |
| AHU-NCN-1 | 480 V | 3 | Motor | 40 | 60 | | 21 | 16700 VA | | (1) 15 HP | 1DAH | 12 |
| AHU-NCN-2 | 480 V | 3 | Motor | 70 | 100 | | 40 | 32000 VA | | (1) 30 HP | 1DAC | 5 |
| AHU-NCN-2 | 480 V | 3 | Motor | 70 | 100 | | 40 | 32000 VA | | (1) 30 HP | 1DAC | 6 |
| AHU-NCN-2 | 480 V | 3 | Motor | 50 | 60 | | 40 | 33200 VA | | (1) 30 HP | 1DAC | 7 |
| AHU-NCN-2 | 480 V | 3 | Motor | 50 | 60 | | 34 | 27100 VA | | (1) 25 HP | 1DAC | 12 |
| AHU-NCN-2 | 480 V | 3 | Motor | 50 | 60 | | 34 | 27100 VA | | (1) 25 HP | 1DBB | 9 |
| AHU-NCN-2F | 480 V | 3 | Motor | 70 | 100 | | 40 | 32000 VA | | (1) 30 HP | 1DAC | 13 |
| AHU-NCN-2 | 480 V | 3 | Motor | 50 | 60 | | 34 | 27100 VA | | (1) 25 HP | 1DBB | 10 |
| AHU-NCN-2 | 480 V | 3 | Motor | 70 | 100 | | 40 | 32000 VA | | (1) 30 HP | 1DAH | 9 |
| AHU-NCN-2J | 480 V | 3 | Motor | 100 | 100 | 60 | 34 | 28200 VA | | (1) 25 HP | 1DBD | 8 |
| AHU-NCN-2 | 480 V | 3 | Motor | 50 | 60 | | 34 | 28200 VA | | (1) 25 HP | 1DBA | 9 |
| AHU-NCN-2L | 480 V | 3 | Motor | 50 | 60 | | 27 | 21500 VA | | (1) 20 HP | 1DBA | 10 |
| VHITWON 3 | 420 \/ | 2 | Motor | 40 | eu. | | 21 | 16700 \// | | /1\ 1£ HD | 1040 | 11 |

Another way that we can improve our coordination between the Mechanical/Plumbing Team and Electrical team is as follows:

First, copy monitor the mechanical equipment into the electrical model using the type Mapping setting under the Collaborate Tab, Copy/Monitor, Select Link, Coordination Setting.


Under Coordination Settings, Select Mechanical Equipment and change the Mapping Behavior from Copy Original to Type Mapping.

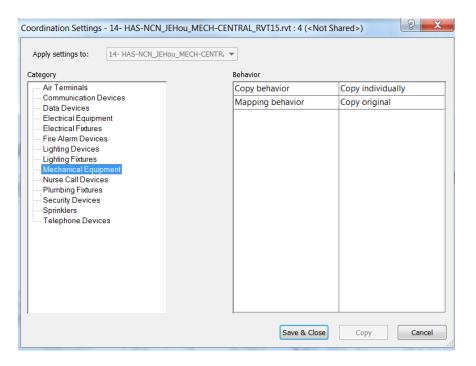


The following screen will pop up. Select the family in the Electrical Model that you would like to be used for the copy/monitoring. This family must be classified as mechanical equipment in order to be able to be selected for the monitoring.




I use an electrical connection symbol.

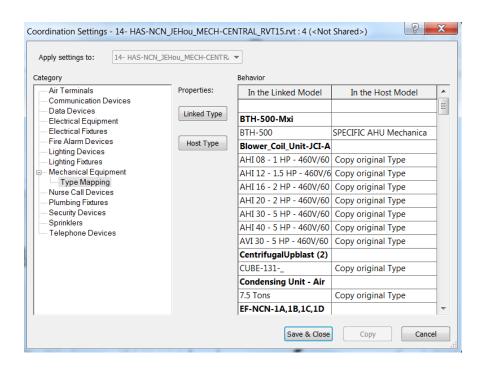


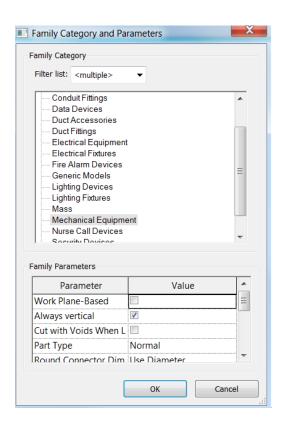

Next create a mechanical equipment schedule with the following fields: Mark, Count, and Horsepower field. It is important that the family instance mark field is named exactly the same in the mechanical and electrical model. Under the fields tab, select the include elements in links. Under the sorting/ grouping tab, do not itemize every instance. This will give us a schedule as follows. The count field should be 2 meaning there is an instance in both the electrical model and the mechanical model. If the horsepower field matches in both instances then the horsepower filed will be populated. If not then it will be blank.

| | | . 1 | | | | |
|---|-----------|------------|--|--|--|--|
| <mechanical equipment<="" th=""></mechanical> | | | | | | |
| <u> </u> | Schedule> | | | | | |
| A | В | C | | | | |
| Mark | Count | SUPPLY FAN | | | | |
| AHU-NCN-1A | 2 | 7.5 | | | | |
| AHU-NCN-1B | 2 | | | | | |
| AHU-NCN-1C | 1 | 10 | | | | |
| AHU-NCN-1D | 1 | 15 | | | | |
| AHU-NCN-1E | 2 | | | | | |
| AHU-NCN-2A | 2 | 30 | | | | |
| AHU-NCN-2B | 1 | 30 | | | | |
| AHU-NCN-2C | 2 | 30 | | | | |
| AHU-NCN-2D | 2 | 25 | | | | |
| AHU-NCN-2E | 2 2 | 25 | | | | |
| AHU-NCN-2F | 2 | | | | | |
| AHU-NCN-2G | 2 2 | 25 | | | | |
| AHU-NCN-2H | | 30 | | | | |
| AHU-NCN-2J | 1 | 25 | | | | |
| AHU-NCN-2K | 1 | 25 | | | | |
| AHU-NCN-2L | 1 | 20 | | | | |
| AHU-NCN-2M | 1 | 15 | | | | |
| AHU-NCN-2N | 1 | 25 | | | | |
| | 1 | 25 | | | | |
| | 1 | 20 | | | | |
| | 1 | 25 | | | | |
| AHU-NCN-2S | 1 | 15 | | | | |
| AHU-NCN-2T | 2 | 30 | | | | |
| AHU-NCN-2U | 1 | 25 | | | | |
| OAHU-NCN-1A | | 15 | | | | |
| OAHU-NCN-1B | | 7.5 | | | | |
| OAHU-NCN-1C | 2 | 25 | | | | |
| OAHU-NCN-1D | 1 | 7.5 | | | | |
| OAHU-NCN-1D | 1 | 50 | | | | |
| OAHU-NCN-3A | 1 | 50 | | | | |
| OAHU-NCN-3B | 1 | 50 | | | | |

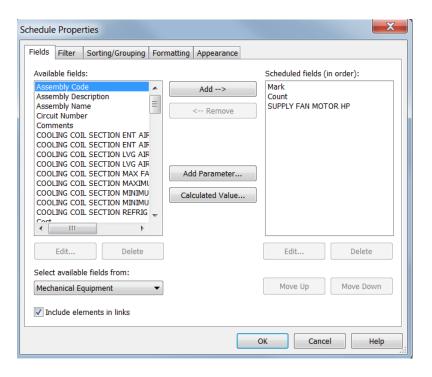

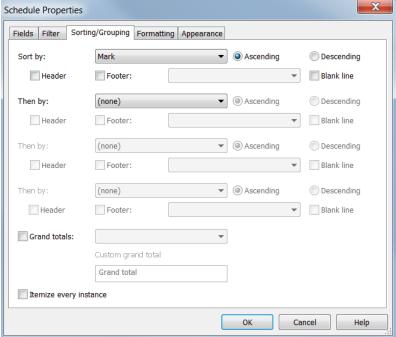

Utilize schedules to check electrical design at the panel and breaker level

Revit is so much more than just a drafting tool. We are able to create circuits that actually connect the electrical load to an electrical equipment panel. We need to have a mindset shift to thinking of Revit as a database and as such what are the ways we can manipulate the data to our advantage. If we are indeed

connecting the loads to the panels, then we should be able to also present the same data in a format that will allow us to verify the loadings of the electrical equipment.

We can use schedules to view the loading on our panels.

Creating a New Panelboard Loading Schedule

- 10. Go to the view tab and select "Schedules" under the create pane or right click on Schedules on the project browser.
- 11. Select "New Schedule/ Quantities"
- 12. Under category select "Electrical Equipment"
- 13. Select the following Available Field and click Add→:
 - a. Panel Name
 - b. Total Connected
 - c. Total Connected Current
 - d. Total Estimated Demand Current
 - e. Mains
 - f. Cooling Estimated Demand Current
 - g. Heating Estimated Demand Current
- 14. Still on the Fields tab, create some calculated values to help with the calculations. Select Calculated Value button.
 - a. Overloaded

i. Name: Overloaded

ii. Discipline: Common

iii. Type: Number

iv. Formula: Total Estimated Demand Current / Mains

b. Total Estimated Demand with NC

i. Name: Total Estimated Demand with NC

ii. Discipline: Electrical

iii. Type: Current

 iv. Formula: Total Estimated Demand Current - if(Heating Estimated Demand Current > Cooling Estimated Demand Current, Cooling Estimated Demand Current, Heating Estimated Demand Current)

Ways To More Effectively Utilize REVIT For Electrical Design Stephanie Elliott, PE - Jacobs Engineering

15. Move the Total Estimated Demand with NC Field to where it is between Total Estimated

Demand Current and Mains.

16. Click on the Filter tab, and create filter to isolate electrical panels from transformers. Create a

filter using a distinctive trait such as panel name i.e. Panel name does not contain a "T", Panel

name begins with, etc

17. On the Sorting/Grouping tab, sort by Panel Name.

18. Click on the Formatting tab, select the following parameters and check the Hidden check box

a. Cooling Estimated Demand Current

b. Heating Estimated Demand Current

c. Overloaded

19. Select mains and then click on the Conditional Formatting Field to create the test to determine if

the mains are loaded to more than 80% of the rating.

20. Select the following:


a. Field: Overloaded

b. Test: Greater Than

c. Value: .8

d. Background Color: Yellow

14

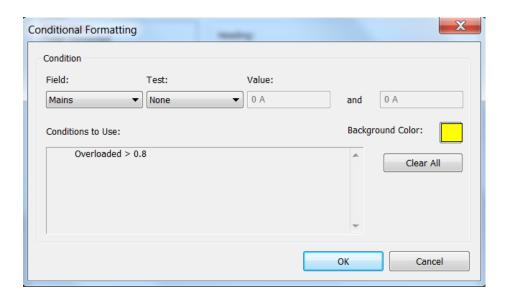


- 21. Select Panel Name and then click on the Conditional Formatting Field to create the test to determine if the mains are under-loaded such that the panel mains could be reduced. Tests for a load of less than 40% of the mains rating.
- 22. Select the following:

a. Field: Overloaded

b. Test: Less Than

c. Value: .4

d. Background Color: Cyan

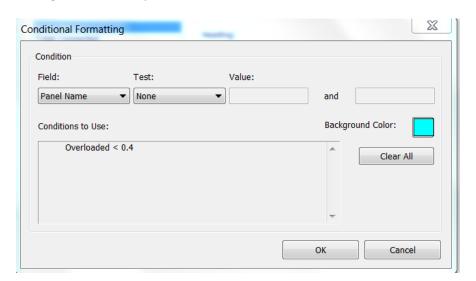

23. Click okay.

| <loading -="" panelboards="" schedule=""></loading> | | | | | | | | | |
|---|-----------------|-------------------------|----------------------|-------------------|--------|--|--|--|--|
| A B C D E | | | | | | | | | |
| Panel Name | Total Connected | Total Connected Current | Total Demand Current | NC Demand Current | Mains | | | | |
| 1DAA | 880362 VA | 1059 A | 1074 A | 911 A | 1600 A | | | | |
| 1DAB | 422566 VA | 508 A | 517 A | 429 A | 1600 A | | | | |
| 1DAC | 293495 VA | 353 A | 364 A | | 800 A | | | | |
| 1DAD | 425009 VA | 511 A | 522 A | | 400 A | | | | |
| 1DAE | 209357 VA | 252 A | 267 A | | 1200 A | | | | |
| 1DAF | 323000 VA | 389 A | 389 A | | 800 A | | | | |

The calculated value to determine Mains overloading is correct but does not take the non-coincidental heating versus cooling diversity. Revit formulas do not play nice with Null or blank values so the comparison between the Non-coincidental current and the mains is a manual/ visual comparison by the end user.

Creating a New Transformer Loading Schedule

- 1. Go to the view tab and select "Schedules" under the create pane or right click on Schedules on the project browser.
- 2. Select "New Schedule/ Quantities"
- 3. Under category select "Electrical Equipment"
- Select the following Available Field and click Add →:
 - a. Panel Name
 - b. Total Connected
 - c. Total Estimated Demand
 - d. Mains
- 5. Still on the Fields tab, create some calculated values to help with the calculations. Select Calculated Value button.
 - a. Overloaded

i. Name: Overloaded

ii. Discipline: Common

iii. Type: Number

iv. Formula: Total Estimated Demand Current / Mains

b. Total Estimated Demand with NC

i. Name: Total Estimated Demand with NC

ii. Discipline: Electrical

iii. Type: Current


- iv. Formula: Total Estimated Demand Current if(Heating Estimated Demand Current > Cooling Estimated Demand Current, Cooling Estimated Demand Current, Heating Estimated Demand Current)
- 6. Click on the Filter tab, and create filter to isolate electrical panels from transformers. Create a filter using a distinctive trait such as panel name i.e. Panel name contains a "T", Panel name begins with, etc
- 7. On the Sorting/Grouping tab, sort by Panel Name.
- 8. Click on the Formatting tab, select the following parameters and check the Hidden check box
 - a. Overloaded
- 9. Select mains and then click on the Conditional Formatting Field to create the test to determine if the mains are loaded to more than 80% of the rating.
- 10. Select the following:

a. Field: Overloaded

b. Test: Greater Than

c. Value: .8

d. Background Color: Yellow

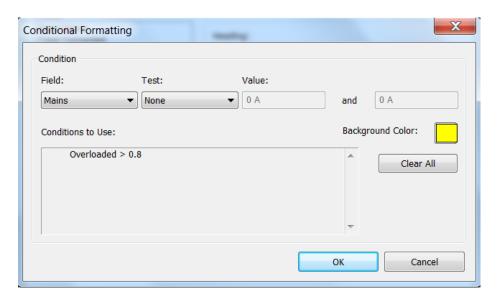

11. Select Panel Name and then click on the Conditional Formatting Field to create the test to determine if the mains are under-loaded such that the panel mains could be reduced. Tests for a load of less than 40% of the mains rating.


12. Select the following:

e. Field: Overloaded

f. Test: Less Than

g. Value: .4

h. Background Color: Cyan

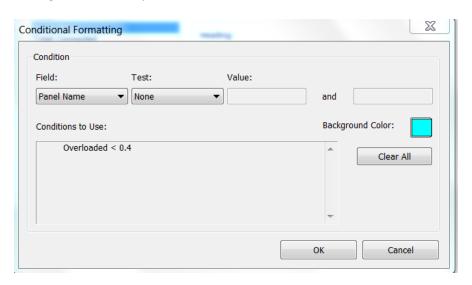

13. Click okay.

Creating a New Circuit Loading Schedule

- 1. Go to the view tab and select "Schedules" under the create pane or right click on Schedules on the project browser.
- 2. Select "New Schedule/ Quantities"
- 3. Under category select "Electrical Circuits"
- 4. Select the following Available Field and click Add→:
 - a. Panel Name
 - b. Circuit Number

- c. Load Name
- d. Rating
- e. Apparent Current
- f. Apparent Load
- g. Wire Size
- h. Length
- i. Voltage
- j. Voltage Drop
- 5. Still on the Fields tab, create some calculated values to help with the calculations. Select Calculated Value button.
 - a. Breaker Loading

i. Name: Overloaded

ii. Discipline: Common

iii. Type: Number

iv. Formula: Apparent Current / Rating


- 6. On the Sorting/Grouping tab, sort by Panel Name.
- 7. Click on the Formatting tab, select the following parameters and check the Hidden check box
 - a. Overloaded
- 8. Select mains and then click on the Conditional Formatting Field to create the test to determine if the mains are loaded to more than 80% of the rating.
- 9. Select the following:

a. Field: Overloaded

b. Test: Greater Than

c. Value: .8

d. Background Color: Yellow

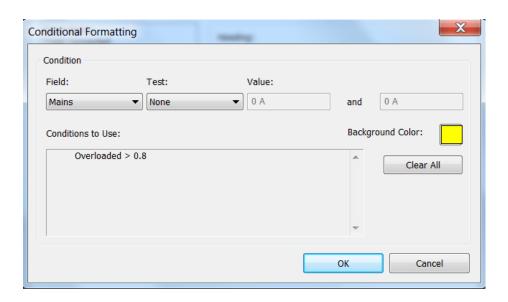


- 10. Select Panel Name and then click on the Conditional Formatting Field to create the test to determine if the mains are under-loaded such that the panel mains could be reduced. Tests for a load of less than 40% of the mains rating.
- 11. Select the following:

i. Field: Overloaded

j. Test: Less Than

k. Value: .4

I. Background Color: Cyan

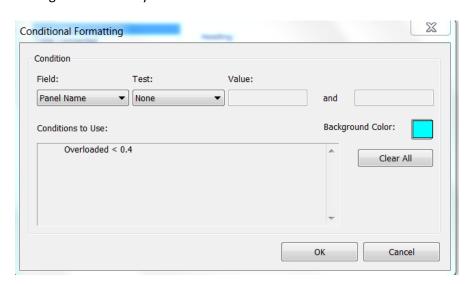

12. Click okay.

I then place all of the three schedules created above on "Z" series sheets to allow them to be printed and reviewed by the senior engineer as part of the QA/QC process as well as to make the data available to staff who may not work directly in Revit to allow them to benefit from the database mindset as well.


Utilize view filters to catch un-circuited electrical items as well as other disciplines that require power

There are two ways in Revit that electrical items can be considered un-circuited. One is a little more obvious to the drafter/designer than the other. In Revit, there is both a graphical representation of the circuit as well as a "electrical" representation of a circuit. Filters can be used to check for both types of un-circuited items.

Filters to check for Un-Circuited Items Where no attempt has been made


To check to see if any attempt has been made to circuit electrical items, create a filter to check if the electrical item is associated with a panel.

- 1. Go to the Visibility/Graphic Overrides window.
- 2. Click on the filters tab.
- 3. Select Edit/New... button.

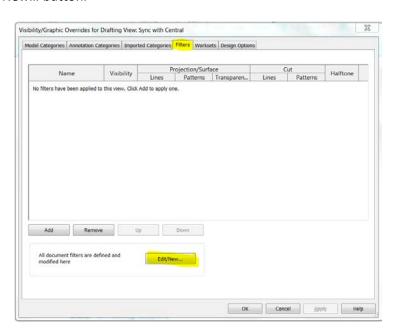


4. Click the new filter button on the button left corner. (Looks like a piece of paper with a sunburst in the corner.)

- 5. Name the filter "CKT to Panel". Click ok.
- 6. Select the categories this filter should be applied to. Select "Electrical Fixtures" and "Light Fixture"

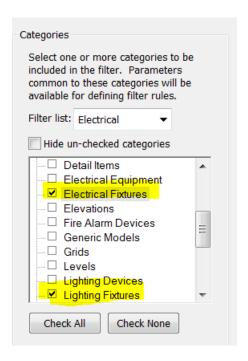

7. Under Filter Rules:

- a. Filter by "Panel Name" equals (blank)
- b. Filter by "Circuit Number" equals (blank)



- 8. Select okay which will return to Visibility/Graphic Overrides window.
- 9. Click add and select the filter just created: "CKT to Panel"
- 10. Click the override button under the Lines category and select green as the color. Select Okay.




11. Click okay to exit the Visibility/Graphic Override window. Revit will think for a minute and then all electrical and lighting fixtures that no attempt has been made to circuit will turn green making it much easier to find on the drawings.

Filters to check for Un-Circuited Items Where an attempt has been made but no completed

Sometimes an attempt is made to circuit an item but it is either not successfully completed or something else changed to break the circuit. To check, create a filter to check if the electrical item is associated with a circuit.

- 1. Go to the Visibility/Graphic Overrides window.
- 2. Click on the filters tab.
- 3. Select Edit/New... button.
- 4. Click the new filter button on the button left corner. (Looks like a piece of paper with a sunburst in the corner.)
- 5. Name the filter "CKT to Breaker". Click ok.
- 6. Select the categories this filter should be applied to. Select "Electrical Fixtures" and "Light Fixture"
- 7. Under Filter Rules:
 - a. Filter by "Circuit Number" equals (blank)
- 8. Select okay which will return to Visibility/Graphic Overrides window.
- 9. Click add and select the filter just created: "CKT to Breaker"
- 10. Click the override button under the Lines category and select red as the color. Select Okay.
- 11. Click okay to exit the Visibility/Graphic Override window. Revit will think for a minute and then all electrical and lighting fixtures that have not been successfully connected to a panel and circuit breaker will turn red making it much easier to find on the drawings.

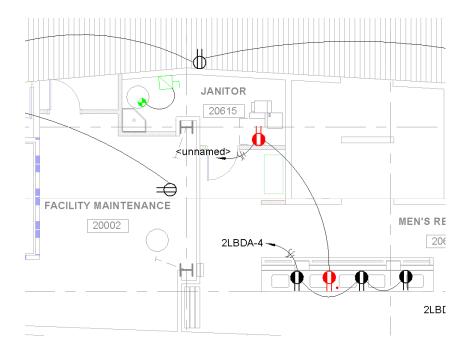

Conclusion

Revit requires a mindset shift from being a drafting tool to a database to be manipulated to show the data in the formats needed to improve efficiencies and coordination processes. When this mindset shift occurs, we are able to utilize schedules to perform energy code calculations, coordinate electrical circuitry with mechanical and plumbing loads, and check electrical design at the panel and breaker level, and as well as us view filters to catch un-circuited electrical items as well as other disciplines that require power. With a little bit of set up time in the front end of the project, we are able to save both time and money on the backend at the deadline. All of these items allow us to share the information with staff not working in Revit as well as improve our quality and deliverable to the client.